


RUNDFLEX

Continuous and quickly adjustable circular formwork for radii greater than 1.00 m

Product Brochure

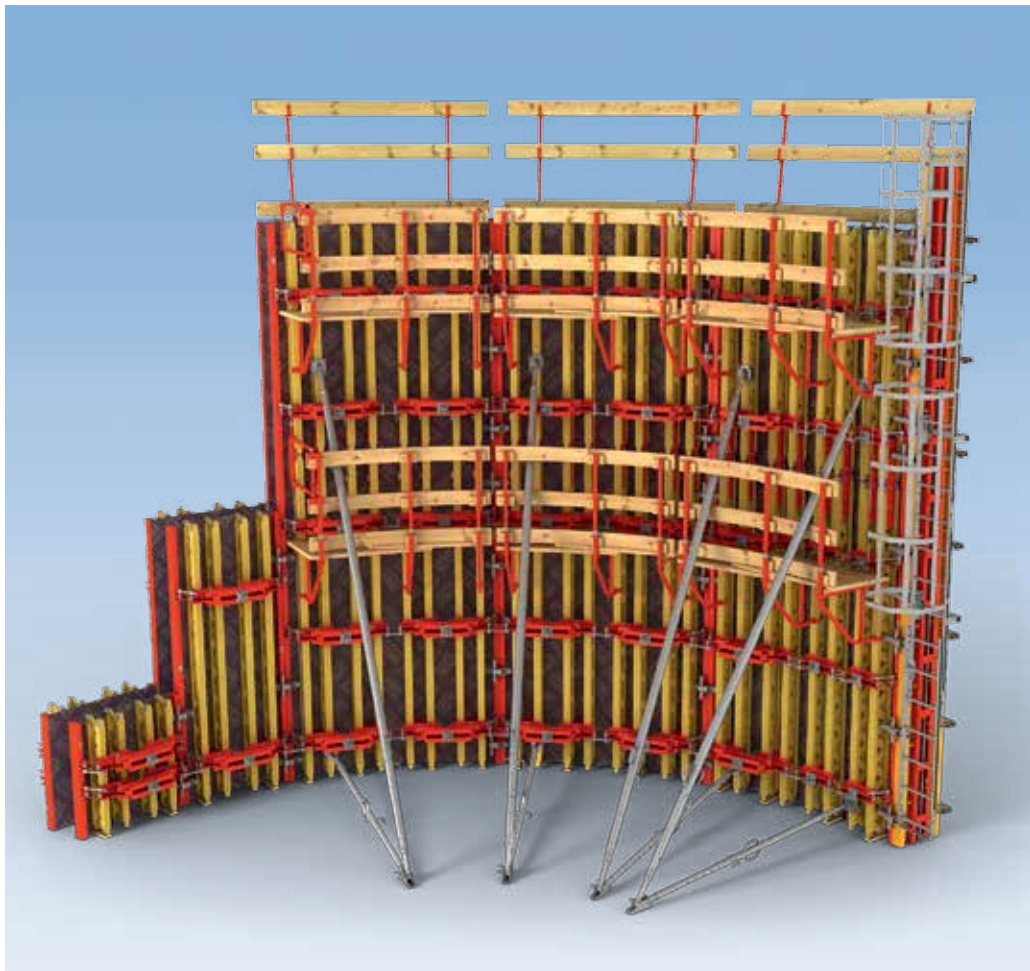

Content

RUNDFLEX system advantages	System overview
4 The continuous and quickly adjustable circular formwork for diameters greater than 1.00 m	12 RUNDFLEX at a glance
6 Low installation effort	Standard applications
8 Fast adjustment	14 Height extensions, working and concreting platform, guidelines for constructing a radius template
10 Extremely variable	16 Push-pull props, stopend formwork, T-junctions, straight wall connection

Edition 07 | 2016

Publisher

PERI GmbH
Formwork Scaffolding Engineering
Rudolf-Diesel-Strasse 19
89264 Weissenhorn
Germany
Tel. +49 (0)7309.950-0
Fax +49 (0)7309.951-0
info@peri.com
www.peri.com

	Project examples
18	RUNDFLEX in use

	Components
22	RUNDFLEX system components

Important notes

Without exception, all current safety regulations and guidelines must be observed in those countries where our products are used.

The photos shown in this brochure feature construction sites in progress. For this reason, safety and anchor details in particular cannot always be considered as conclusive or final. These are subject to the risk assessment carried out by the contractor.

In addition, computer graphics are used which are to be understood as system representations. For ensuring a better understanding, these and the detailed illustrations shown have been partially

reduced to certain aspects. The safety installations which have possibly not been shown in these detailed descriptions must nevertheless be available. The systems or items shown might not be available in every country.

Safety instructions and load specifications are to be strictly observed at all times. Modifications and deviations require a separate static proof.

The information contained herein is subject to technical changes in the interests of progress. Errors and typographical mistakes reserved.







RUNDFLEX

The continuous and quickly adjustable circular wall formwork for radii with diameters greater than 1.00 m

The RUNDFLEX Circular Wall Formwork provides pre-assembled standard panels for circular walls which can be quickly adjusted without any complicated panel modifications in order to achieve the required radius. Therefore, the circular formwork is particularly effective for realizing structures such as wastewater treatment plants, spiral ramps for multi-storey parking facilities, silos or oriels where radii are constantly changing.

This results in low utilization rates per formwork element and radius. In order to be able to efficiently form these

structures, formwork elements must be quickly and flexibly adjusted to suit different radii. RUNDFLEX solves this problem with standard elements and fast radii adjustment. Material costs and time requirements can be significantly reduced with RUNDFLEX – even for radii of 1.00 m.

With a permissible fresh concrete pressure of 60 kN/m², RUNDFLEX also allows high concreting speeds.



Low installation effort

through pre-assembled units and the proven BFD Alignment Coupler



Fast and precise adjustment

through a simple adjustment procedure by means of a template and spindles



Extremely variable

through the flexible adjustment of wall internal radii of 1.00 m and larger – also for complicated geometries

Low installation effort

Fast forming operations through pre-assembled standard elements and the proven BFD Alignment Coupler



RUNDFLEX elements are pre-assembled at the assembly hall and are available in 3 different panel widths and 6 panel heights.

In order to reduce transportation space to a minimum, elements are bundled together in a straight form and then adjusted on the construction site to suit the required radius.




Element connections and required compensations up to 10 cm are carried out quickly and simply with the BFD Alignment Coupler.

When connecting the elements, ensure that the elements (external and internal) are aligned on their axis.

For the use of filler timbers up to a maximum of 10 cm between the external and internal elements, corresponding tables are available. For smaller radii, filler timbers are to be cut to a suitable trapezoidal shape.

The alignment coupler can also be used for connecting RUNDFLEX with the elements of other formwork systems (e.g. with TRIO).

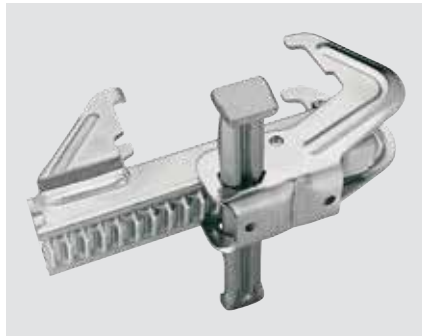

For connecting the elements, the BFD Alignment Coupler ensures flush, aligned and tight panel connections.




The BFD Alignment Coupler connects the panels; the Adjusting Spindle is only required when the element units are moved.


Elements for radii ≥ 4.00 m

Plywood: 21 mm

External elements

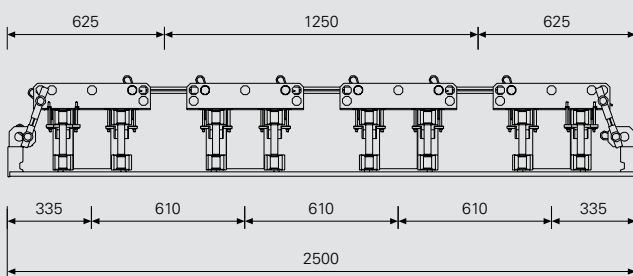


Internal elements

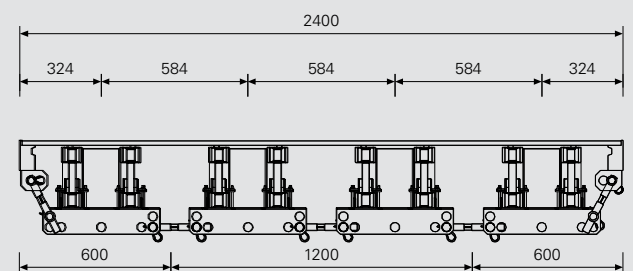


Elements for radii ≥ 2.50 m

Plywood: 18 mm

External elements




Internal elements




Elements for radii ≥ 1.00 m

Plywood: 2 x 9 mm

External elements



Internal elements



Fast and precise adjustment

Simple setting of the radii with adjustable spindles and templates

The pre-assembled RUNDFLEX elements can be quickly adapted to changes in the radii with a minimum of effort.

By means of the self-cleaning Adjusting Spindles, the formwork is easily adjusted to fit the required curvature using a Ratchet Spanner and template. PERI delivers the ready-to-use customized radii templates to the construction site. Complicated geometries with constantly changing radii are also quickly and easily formed in this way using RUNDFLEX.


In the process, the adjustable spindles are installed so that the yellow chromated parts are always facing the same direction. Through the same turning direction in each case, the adjusting procedure is uncomplicated and fast.



Checking the required curvatures is carried out by placing the radius template on the formwork girders.

How it's done

Radii adjustment basically begins with the spindles in the middle of the element and then work outwards in a uniform sequence.

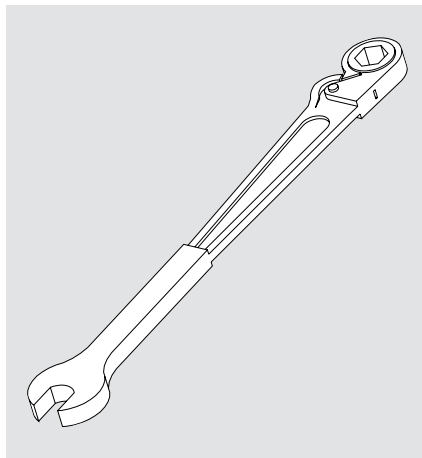

The "combi" Ratchet Spanner for quick adjustment of RUNDFLEX elements.



The adjustable spindle for adjusting the edge profile is also operated by means of the "combi" Ratchet Spanner.


Extremely variable

Flexible adjustment of wall internal radii of 1.00 m and larger – also for complicated geometries



RUNDFLEX is an enormously versatile and adaptable circular wall formwork. The system provides a solution for virtually any challenge in connection with curvatures, changing radii, roundings and arches.

Through the possible combination of RUNDFLEX with other formwork systems, complicated ground plans can also be cost-effectively realized. Using the BFD Alignment Coupler, RUNDFLEX elements can be effortlessly combined with TRIO Panel Formwork.

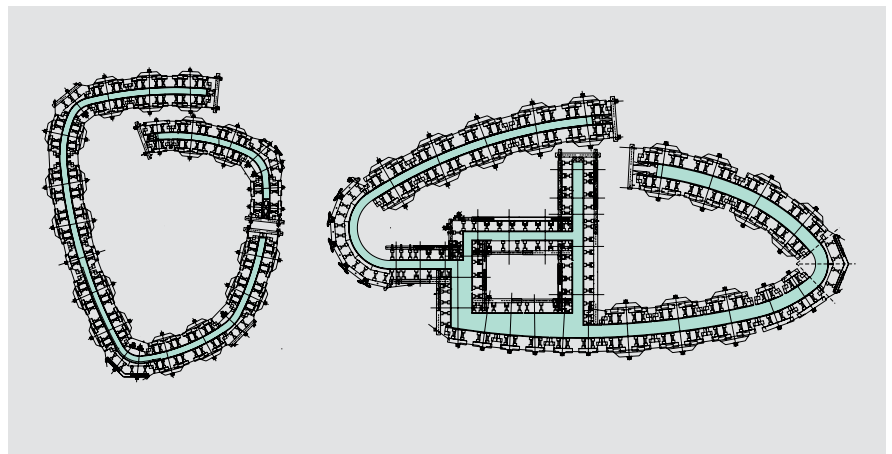




For applications such as tunnel portals or other arched forms, RUNDFLEX can also be used horizontally.


Elliptically-shaped tunnel portal with RUNDFLEX elements and accessories from the VARIO programme. The problem of constantly changing radii and inclination was solved by means of conically-cut filler timbers.




RUNDFLEX at a glance

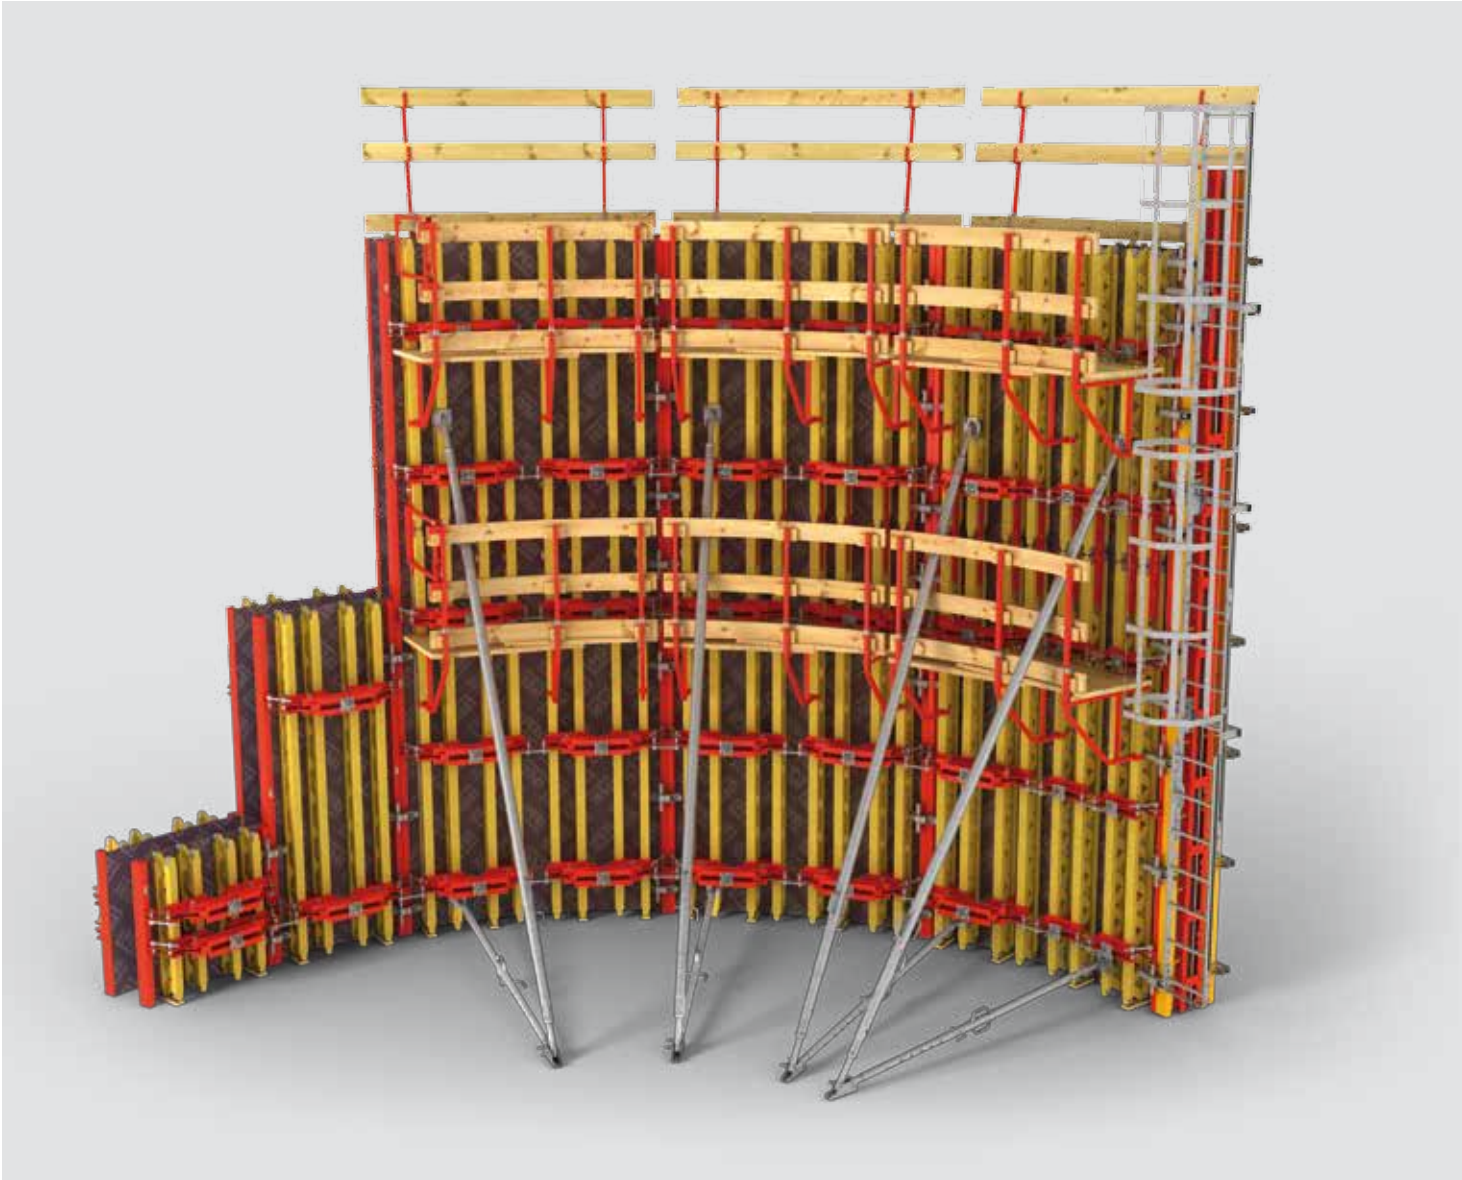

T-Junctions

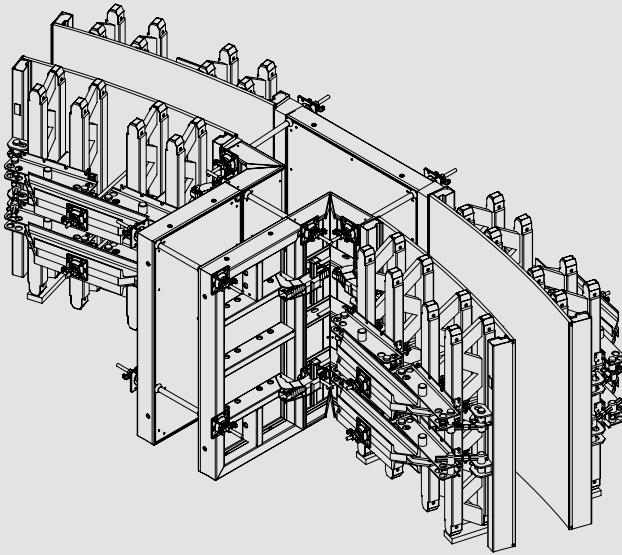

Straight wall connection

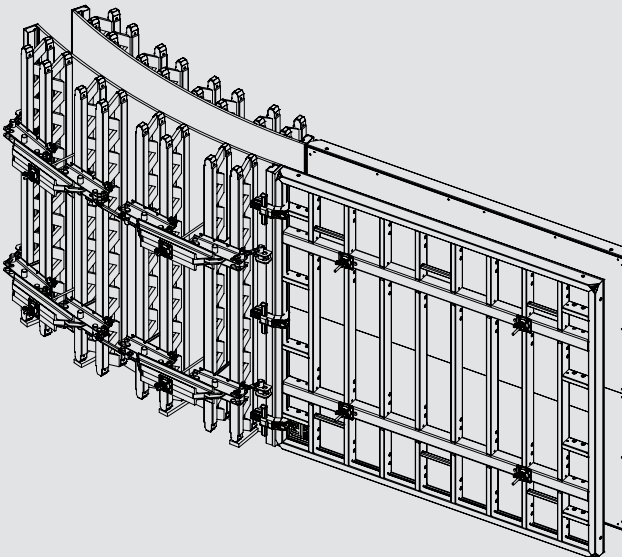**A well-rounded success**

RUNDFLEX provides a fast solution in the system for all standard applications. The right accessories are available for height extensions and stopend formwork as well as wall connections. Last but not least, the portfolio includes system supplements for realizing safe working and concreting platforms on the formwork.


Height extensions, working and concreting platform, guidelines for constructing a radius template

Height extensions




RUNDFLEX elements can be extended in 60 cm increments.

RUNDFLEX elements can be extended horizontally up to a length of 7.80 m and then erected as one unit. For extending in a vertical position as well as transporting vertically, higher units are also possible.

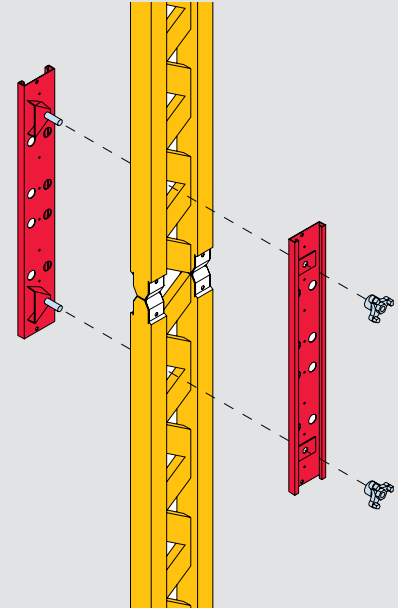

Horizontal extensions take place in a straight line; one extension splice is to be mounted per girder joint.

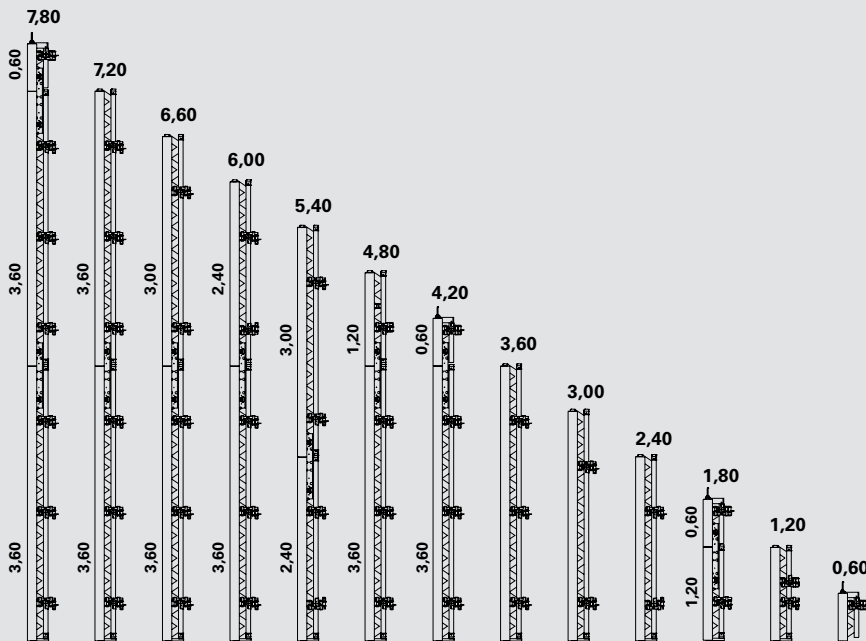

Working and Concreting Platform

For the installation of safe working and concreting scaffold, RUNDFLEX provides all required system components.

The scaffold bracket can be mounted at each nodal point of the Lattice Girder GT 24. Platform lining, side and rear protection are supplemented in accordance with respective national regulations.


Assembly of components takes place on a horizontally-positioned element. In addition, an access ladder can be mounted to the first and last element of a set of formwork.



Guidelines for constructing a radius template

For the external formwork

Radius = concrete radius + 26.5 cm (for 21 mm plywood thickness and 4 mm formlining strip on GT 24 girders).

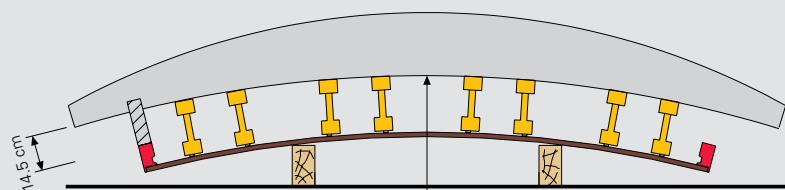


Radius template for elements
A 250 outside / I 240 inside,
A 128 outside / I 123 inside

$$R_a = \text{concrete radius} + 26.5 \text{ cm}$$

For the internal formwork

Radius = concrete radius - 26.5 cm (for 21 mm plywood thickness and 4 mm formlining strip on GT 24 girders).

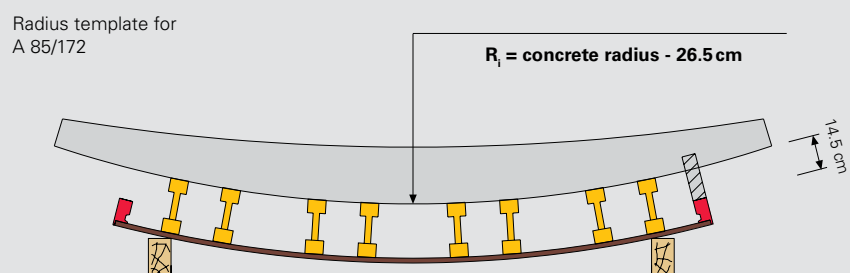

Radius template for
A 85/172

$$R_i = \text{concrete radius} - 26.5 \text{ cm}$$


Push-pull props, stopend formwork, T-junctions, straight wall connections

Push-pull props

RUNDFLEX elements are supported with push-pull props and kickers.

Girder headpieces allow push-pull props and kickers to be fixed on Lattice Girders GT 24 as well as in the area of the extension splices. Push-pull props and kickers are mounted by means of pins and cotter pins.


Push-pull props are also mounted on horizontally-positioned elements.

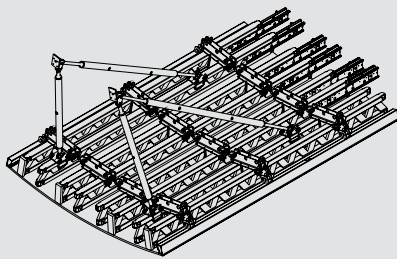


Stopend formwork

Stopend formwork can be realized with and without continuous reinforcement.

TRIO Stopend Panels – with and without water bar installation – are suitable for the stopend formwork of RUNDFLEX elements. Alternatively, stopend formwork complete with steel walers is provided by the contractor, or SRS Circular Columns can also be used as stopend formwork.

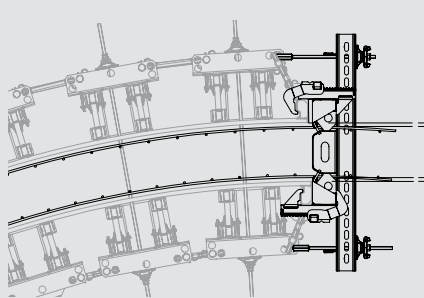

Stopend formwork for RUNDFLEX with the TRIO Stopend Panel and continuous reinforcement.

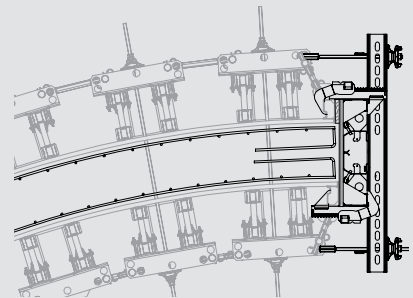


Stopend formwork for RUNDFLEX with the TRIO Stopend Panel without continuous reinforcement.


Connecting panel formwork

The edge profile of the RUNDFLEX element allows PERI panel formwork to be connected to the circular formwork by means of BFD-suitable profiles.

In this way, the transition to straight wall sections can be quickly and easily realized. Depending on the radius, the use of filler timbers may be required.

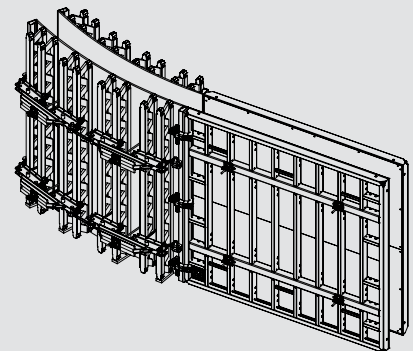

Straight outgoing walls can also be easily realized. For normal wall thicknesses, a 90 cm wide frame panel is used for this purpose on the outer side of the formwork; on the inner side, two articulated corners or two internal corners are connected.

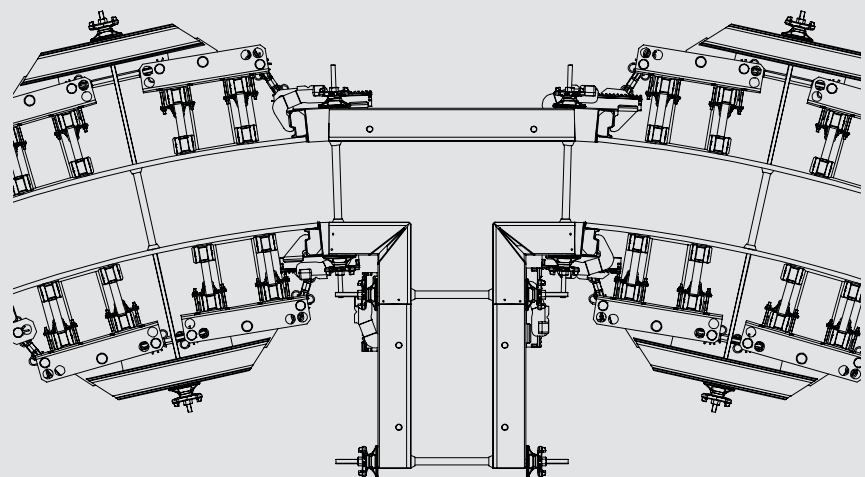

RUNDFLEX in use



MAC Museum, Singen, Germany

With the Museum Art & Cars (MAC), the town of Singen in Baden-Württemberg has a unique and unmistakable museum building. In the style of the nearby Hohentwiel fortress, the

walls and roof landscape of the structure are repeatedly curved. In addition to the range of specific architectural requirements, high demands were placed on the static through the earthquake-resistant design of the museum. For the complex shapes, RUNDFLEX

proved itself to be the optimal solution. With the easily adaptable formwork system, the various merging radii were continuously and quickly realized without any problems.



RUNDFLEX in use



Text-book execution: the in-situ concrete curvatures feature variable radii.



Exceptional challenge in housing construction: reinforced concrete walls with constantly changing radii and offset residential floors.

Secondary School, Bochum, Germany

The new secondary school in Bochum, with approx. dimensions of 125 m x 70 m, required a tight schedule with a construction period of only seven months. The three-storey complex consists of two interlocking, ring-shaped structures. In the process, the radii of the two rings continuously change.

For forming the multiple curved shape of the structure, the continuous adjustment option of the RUNDFLEX elements proved to be enormously time saving. The fact that the TRIO Panel Formwork could be easily and simply connected for the straight wall sections, also accelerated formworking operations.

Single-family house, Tuttlingen, Germany

The basement and residential floors of this single-family house consist almost entirely of circular-shaped walls with constantly changing radii and offset living areas. Just the 2.75 m high basement walls alone feature ten different radii and were formed with RUNDFLEX and TRIO in seven cycles.

The RUNDFLEX elements could be accurately and quickly adjusted on the construction site for the next cycle. At the same time, element connections with the BFD Alignment Coupler system allowed timber compensations up to 10 cm thick as well as the combination with the TRIO Panel Formwork.



RUNDFLEX also for architectural concrete: depending on requirements, the very best surface qualities can also be achieved with the circular formwork.

Arena Stage, Washington, USA

The refurbishment and expansion of the Arena Stage Theater includes, among other things, an elliptically-shaped structure whose walls feature 4° inclinations and reach a height of 23 m. Furthermore, very high architectural concrete requirements were placed on the surfaces of these walls.

RUNDFLEX formwork was used which included high-grade formlining. For the higher-positioned areas, the construction team combined the wall formwork with the CB 240 Climbing System. The units were climbed from concreting cycle to cycle by crane.



RUNDFLEX in use for the shaft of a pump station with a diameter of 25 m.

Pump Station, Preston, England

As part of a major project for improving the sewage system in Preston, a central pumping station was built in Penwortham which, after it was completed, directs rain water among other things to the wastewater treatment plant in Clifton Marsh.

The excavated shaft for the station has a diameter of over 25 m and a depth of 36 m. For the shaft mantle and dividing walls, 5,000 m² of heavily reinforced concrete was used. The formwork solution for the mantle of the shaft consisted of a combination of RUNDFLEX and TRIO elements.

Item no.	Weight kg
021800	127.000
021820	176.000
102856	231.000
126073	292.000
021840	342.000
021400	422.000
021880	513.000

- Outside Panels A 250**
- Outside Panel A 250 x 60**
- Outside Panel A 250 x 120**
- Outside Panel A 250 x 120 2R**
- Outside Panel A 250 x 180**
- Outside Panel A 250 x 240**
- Outside Panel A 250 x 300**
- Outside Panel A 250 x 360**



Ready-to-use formwork panel for circular structures.

Note

Element without distribution waler.
 Panel A 250 x 60 and A 250 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 4.0 m. Plywood 21 mm.
 Permissible load-bearing point capacity 700 kg with crane sling angle $\leq 15^\circ$.

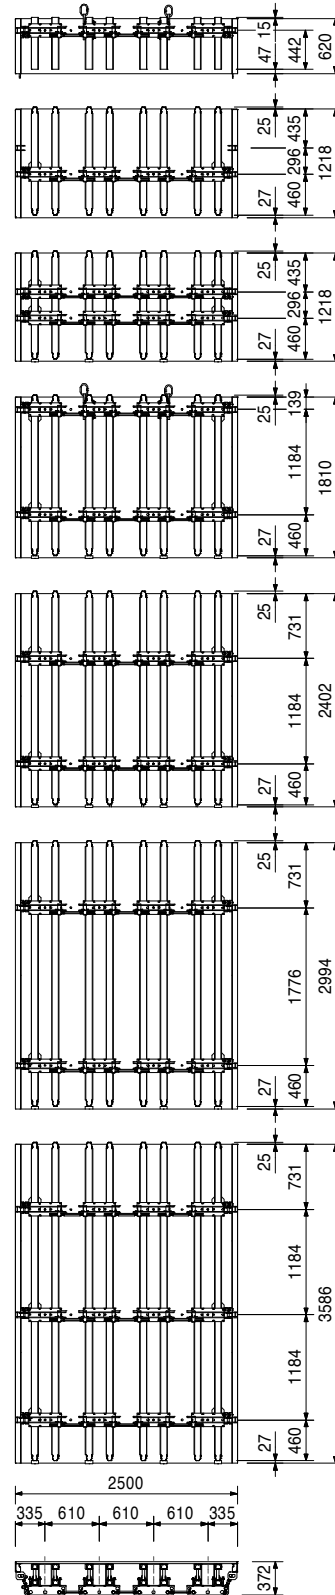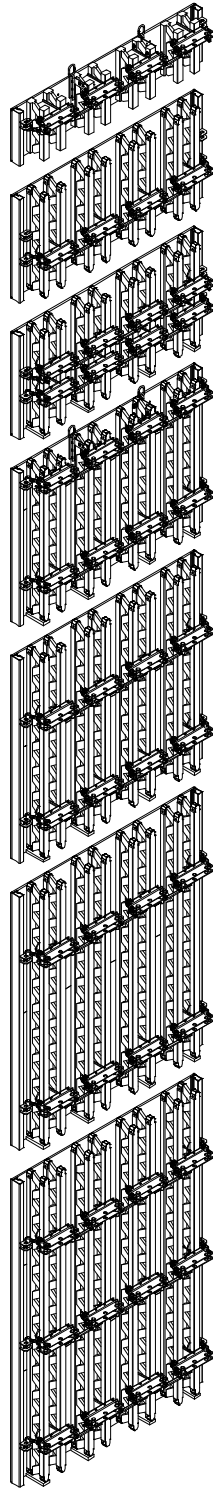

Item no.	Weight kg
021810	124.000
021830	169.000
102855	219.000
126043	283.000
021850	335.000
021410	408.000
021890	499.000

- Inside Panels I 240**
- Inside Panel I 240 x 60**
- Inside Panel I 240 x 120**
- Inside Panel I 240 x 120 2R**
- Inside Panel I 240 x 180**
- Inside Panel I 240 x 240**
- Inside Panel I 240 x 300**
- Inside Panel I 240 x 360**



Ready-to-use formwork panel for circular structures.

Note

Element without distribution waler.
 Panel I 240 x 60 and I 240 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 4.0 m. Plywood 21 mm.
 Permissible load-bearing point capacity 700 kg with crane sling angle $\leq 15^\circ$.

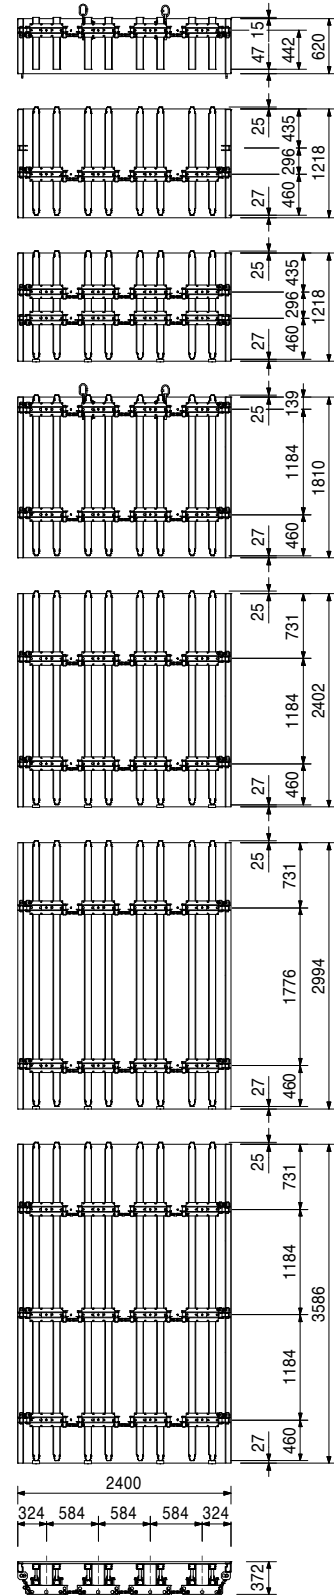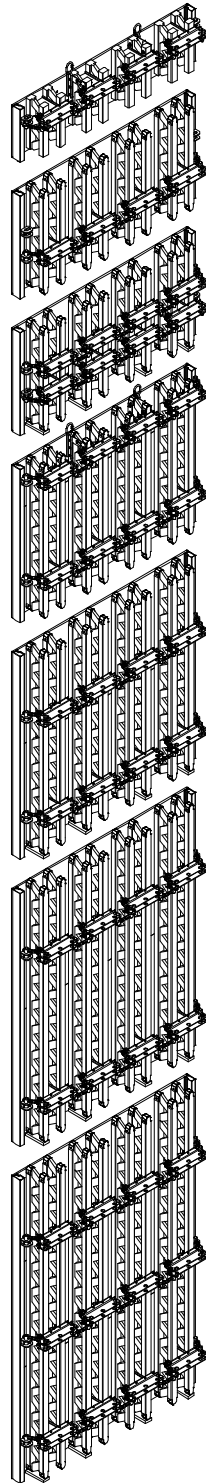

Item no.	Weight kg
021900	72.500
021920	99.000
102854	128.000
126075	167.000
021940	194.000
021420	243.000
021960	289.000

- Outside Panels A 128**
- Outside Panel A 128 x 60**
- Outside Panel A 128 x 120**
- Outside Panel A 128 x 120 2R**
- Outside Panel A 128 x 180**
- Outside Panel A 128 x 240**
- Outside Panel A 128 x 300**
- Outside Panel A 128 x 360**


Ready-to-use formwork panel for circular structures.

Note

Element without distribution waler.
 Panel A 128 x 60 und A 128 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 2.5 m. Plywood 18 mm.
 Permissible load-bearing point capacity 700 kg with crane sling angle $\leq 15^\circ$.

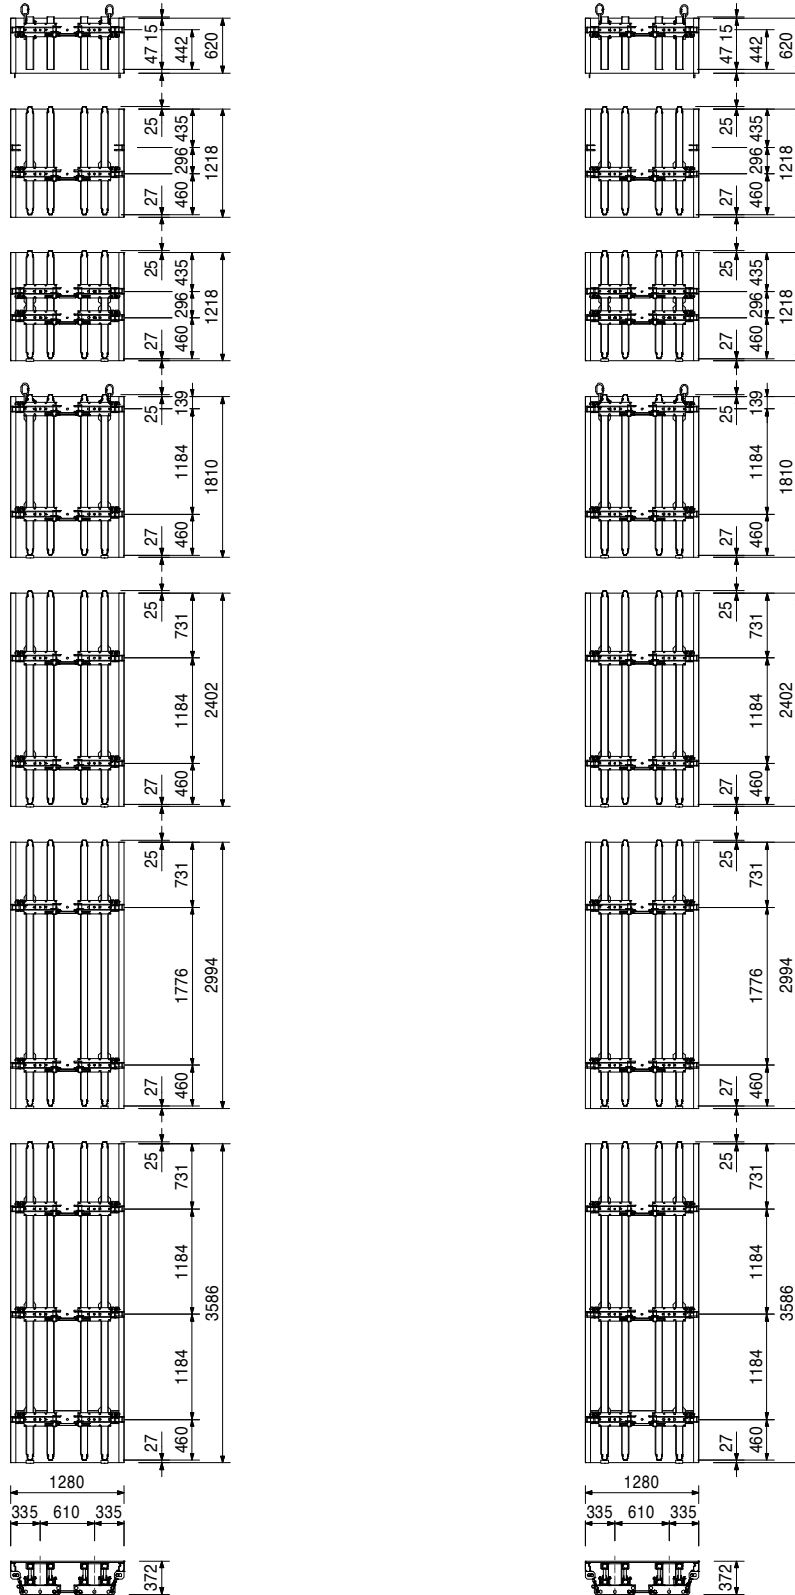

Item no.	Weight kg
021910	71.200
021930	95.300
102853	122.000
126067	160.000
021950	186.000
021430	235.000
021970	275.000

- Inside Panels I 123**
- Inside Panel I 123 x 60**
- Inside Panel I 123 x 120**
- Inside Panel I 123/120 2R**
- Inside Panel I 123 x 180**
- Inside Panel I 123 x 240**
- Inside Panel I 123 x 300**
- Inside Panel I 123 x 360**



Ready-to-use formwork panel for circular structures.

Note

Element without distribution waler.
 Panel I 123 x 60 and I 123 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 2.5 m. Plywood 18 mm.
 Permissible load-bearing point capacity 700 kg with crane sling angle $\leq 15^\circ$.

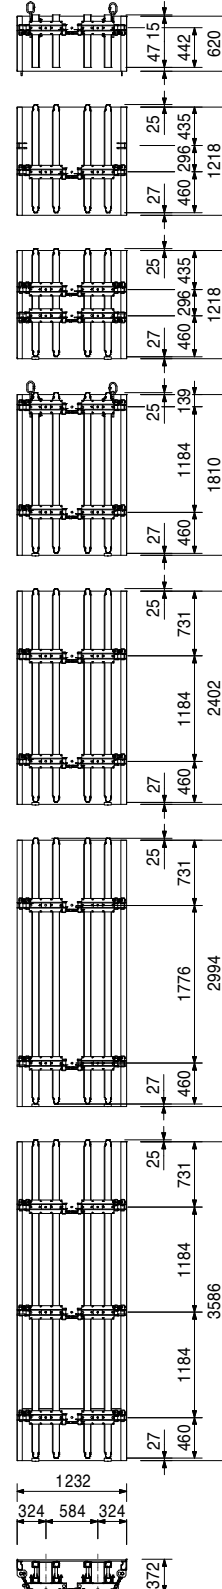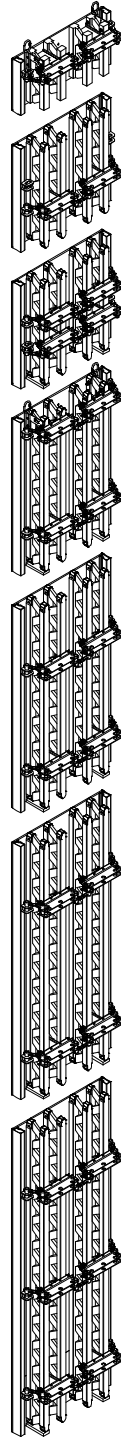

Item no.	Weight kg
020820	91.300
126079	120.000
020840	136.000
020860	175.000
020880	203.000

Outside Panels A 85

Outside Panel A 85 x 120

Outside Panel A 85 x 180

Outside Panel A 85 x 240

Outside Panel A 85 x 300

Outside Panel A 85 x 360







Ready-to-use formwork panel for circular structures.

Note

Element without distribution waler.
Panel A 85 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 1.0 m. Plywood 2 x 9 mm.
Permissible load-bearing point capacity 700 kg with crane sling angle $\leq 15^\circ$.



Item no.	Weight kg
020830	74.300
126070	101.000
020850	116.000
020870	153.000
020890	173.000

Inside Panels I 72

Inside Panel I 72 x 120

Inside Panel I 72 x 180

Inside Panel I 72 x 240

Inside Panel I 72 x 300

Inside Panel I 72 x 360

Ready-to-use formwork panel for circular structures.







Note

Element without distribution waler.

Panel I 72 x 180 complete with crane eye on the left and on the right side.

Technical Data



Minimum radius 1.0 m. Plywood 2 x 9 mm.
Permissible load-bearing point capacity 700 kg with crane sling angle $\leq 15^\circ$.



Item no.	Weight kg
023500	4.580

Alignment Coupler BFD, galv.
For all panel connections for MAXIMO, TRIO and RUNDFLEX. Fillers up to 10 cm.



Technical Data
Permissible tension force 20.0 kN.

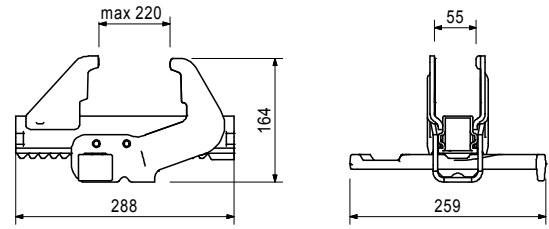

023940	6.080
--------	-------

Alignment Coupler 38, galv.
For element connections with RUNDFLEX.



Note
Compensation up to 26 cm.
Technical Data
Permissible tension force 20.0 kN.

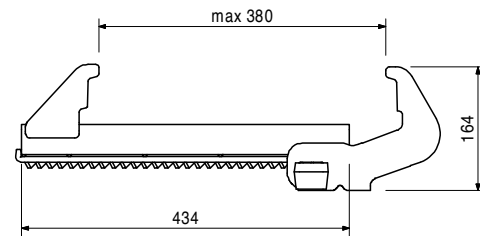

021620	3.770
--------	-------

Adjusting Spindle 500, galv.
For aligning RUNDFLEX external elements. For panel joints of external and internal elements.



Complete with
2 pc. 022230 Cotter Pin 5/1, galv.
Note
With self-cleaning hexagonal thread.

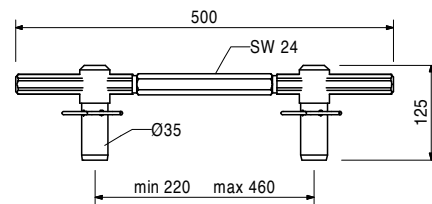

021610	2.830
--------	-------

Adjusting Spindle 210, galv.
For aligning RUNDFLEX internal elements and the edge profiles on external and internal elements.




Complete with
2 pc. 022230 Cotter Pin 5/1, galv.
Note
With self-cleaning hexagonal thread.



Item no.	Weight kg
021630	18.300

Distribution Waler

For transferring anchor forces on two adjacently positioned T-walers.



Accessories

021640	1.260
--------	-------

Waler Bolt for RUNDFLEX, galv.



021640	1.260
--------	-------

Waler Bolt for RUNDFLEX, galv.

For fixing the distribution waler on the T-Waler.

Complete with

1 pc. 022230 Cotter Pin 5/1, galv.



024480	7.040
--------	-------

Extension Splice 24-2



For extending GT 24 girders and VARIO GT 24 panels up to max. height of 8.00 m.

Complete with

2 pc. 030190 Three Wingnut DW 15, galv.

Note

Permissible load: see PERI Design Tables.



Item no.	Weight kg
070760	4.650

Crane Splice GT 24

For transporting elements by crane with the GT 24 girder.

Complete with



1 pc. 018050 Pin \varnothing 16 x 65/86, galv.
2 pc. 018060 Cotter Pin 4/1, galv.

Note

Follow Instructions for Use!

Technical Data

Permissible load-bearing capacity 700 kg with crane sling angle $\leq 15^\circ$.



021990	2.780
021980	2.780

Crane Eyes 24

Crane Eye 24, right

Crane Eye 24, left

For transporting elements by crane with the GT 24 girder. Mounted securely to the element.

Complete with



4 pc. 710138 Bolt ISO 4014 M10 x 110-8.8, galv.
4 pc. 780356 Nut ISO 7042 M10-8, galv.
4 pc. 710139 Washer R11 DIN 440, galv.

Note

Illustration shows Crane Eye 24, left.
Follow Instructions for Use!

Technical Data

Permissible load-bearing capacity 700 kg with crane sling angle $\leq 15^\circ$.

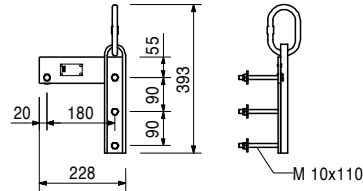



027110	11.000
--------	--------

Scaffold Bracket GB 80

For assembly of a working and concreting scaffold with GT 24 girder.

Technical Data



Permissible load 150 kg/m². Maximum width of influence 1.25 m.

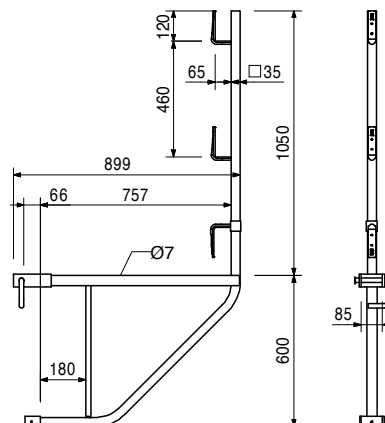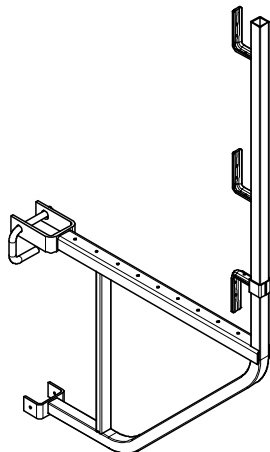

Item no.	Weight kg
112159	2.120

Handrail Post Holder VARIO
For assembling a guardrail with GT 24 Girder.

Complete with
1 pc. 024250 Wedge K, galv.
1 pc. 780800 Sleeve ISO 8752 8 x 20, galv.
Technical Data
Maximum width of influence 2.00 m.




Accessories

116292	4.730
--------	-------

Guardrail Post HSGP-2

116292	4.730
--------	-------


Guardrail Post HSGP-2
As guardrail for different systems.



021790	1.000
--------	-------

Ratchet Spanner SW 24 "Combi"
For adjusting RUNDFLEX Panels and Cantilevered Parapet Platform GKB.


Note
Length approx. 500 mm.



099540	0.000
098217	0.000

Templates for RUNDFLEX
Template for RUNDFLEX A250, I240, A128, I123
Template for RUNDFLEX A85, I72
The template is used for external and internal elements.


Note
Including material (formlining). Produced in accordance with project requirements.



Item no.	Weight kg
109411	6.450


Ladder Connector RFP

For connecting ladders at RUNDFLEX Plus and RUNDFLEX panels.



Complete with


2 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
2 pc. 701763 Clamping Plate FI 25 x 10 x 90



051410	11.700
--------	--------


Ladder 180/6, galv.

As access for PERI Formwork Systems.

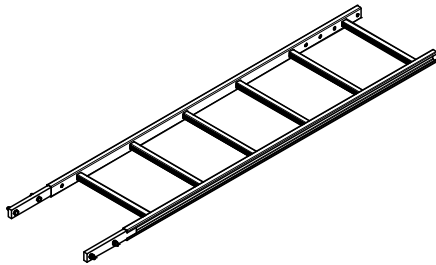

Complete with



4 pc. 710224 Bolt ISO 4017 M12 x 40-8.8, galv.
4 pc. 710381 Nut ISO 7042 M12-8, galv.

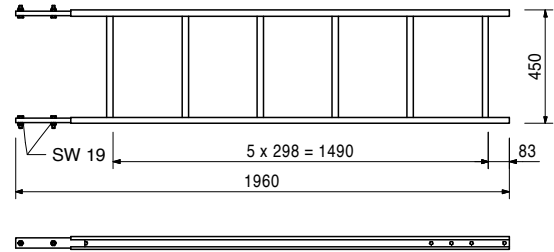

051460	2.180
--------	-------

Ladder Base, galv.

As bottom ladder connection and for securing ladders against sliding on the scaffold decks.



103718	0.684
--------	-------


Ladder Hook, galv.

For adjusting the bottom ladder.
Always use in pairs.



Complete with



2 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
2 pc. 710381 Nut ISO 7042 M12-8, galv.



Item no.	Weight kg
104132	15.600
051450	25.200

Ladder Safety Cages, galv.
Ladder Safety Cage 75, galv.
Ladder Safety Cage 150, galv.
 Ladder safety cage for PERI Access Ladders.



Complete with
 4 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
 4 pc. 701763 Clamping Plate FI 25 x 10 x 90

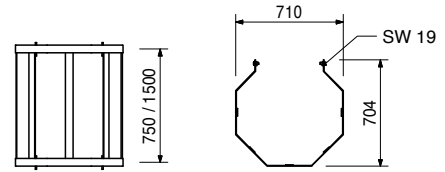

109420	27.000
--------	--------

Ladder Safety Cage RFP 200
 Ladder safety cage for access ladders with exit on the side.



Complete with
 4 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
 4 pc. 701763 Clamping Plate FI 25 x 10 x 90

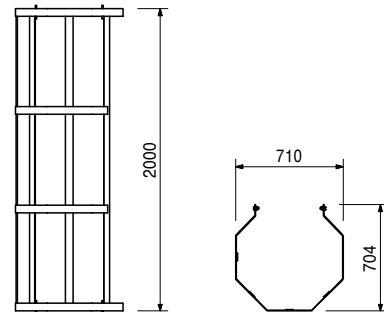

028050	4.550
--------	-------

Girder Headpiece GT 24, galv.
 For connecting push-pull props and kicker braces to GT 24 Girders



Complete with
 1 pc. 027170 Pin Ø 16 x 42, galv.
 1 pc. 018060 Cotter Pin 4/1, galv.

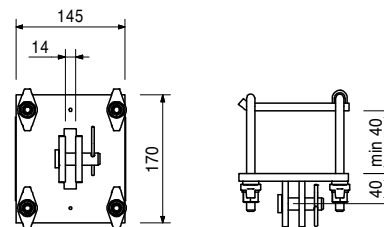

028070	4.680
--------	-------

Girder Headpiece GT 24/A, galv.
 For connecting push-pull props and kicker braces to extended GT 24 Girders in the area of the Extension Splice 24-2.

Complete with
 1 pc. 027170 Pin Ø 16 x 42, galv.
 1 pc. 018060 Cotter Pin 4/1, galv.

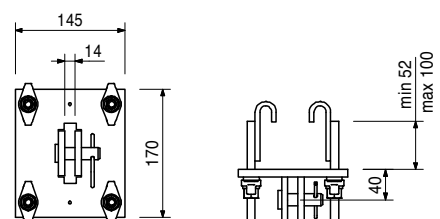



Item no.	Weight kg
028060	1.940

Wedge Headpiece SRZ/SRU

For connecting push-pull props and kicker braces to Steel Waler SRZ and SRU Profile U100 – U140.

Complete with

1 pc. 027170 Pin \varnothing 16 x 42, galv.
1 pc. 018060 Cotter Pin 4/1, galv.

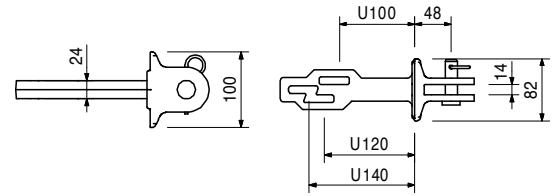

Accessories


024250	0.331
--------	-------

Wedge K, galv.

024250	0.331
--------	-------

Wedge K, galv.

For coupling Compression Plate KDP, Wedge Head Piece SRZ/SRU and Waler Connector SB-A, B, C.





117466	10.600
--------	--------

Push-Pull Prop RS 210, galv.

Extension length $l = 1.30 - 2.10$ m.
For aligning PERI formwork systems and precast concrete elements.

Note

Permissible load see PERI Design Tables.

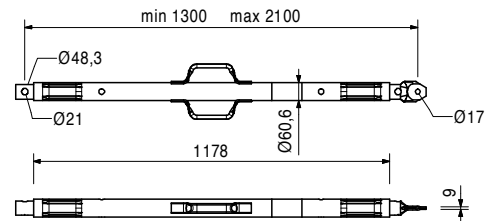



118238	12.200
--------	--------

Push-Pull Prop RS 260, galv.

Extension length $l = 2.30 - 2.60$ m.
For aligning PERI formwork systems and precast concrete elements.

Note

Permissible load see PERI Design Tables.

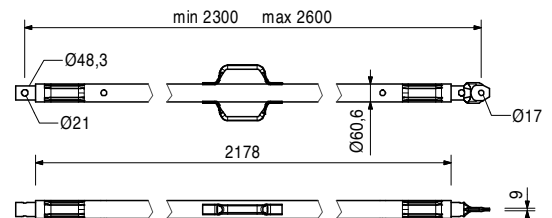



Item no.	Weight kg
117467	15.500

Push-Pull Prop RS 300, galv.

Extension length $l = 1.90 - 3.00$ m.
For aligning PERI formwork systems and precast concrete elements.

Note

Permissible load see PERI Design Tables.

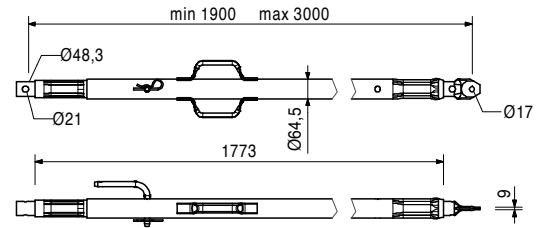



117468	23.000
--------	--------

Push-Pull Prop RS 450, galv.

Extension length $l = 2.80 - 4.50$ m.
For aligning PERI formwork systems and precast concrete elements.

Note

Permissible load see PERI Design Tables.

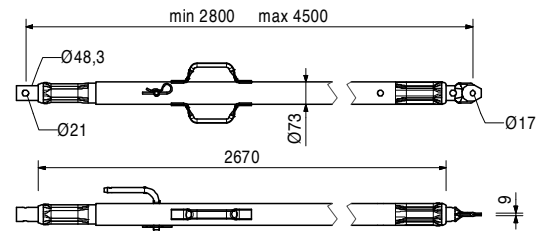



117469	40.000
--------	--------

Push-Pull Prop RS 650, galv.

Extension length $l = 4.30 - 6.50$ m.
For aligning PERI formwork systems and precast concrete elements.

Note

Permissible load see PERI Design Tables.

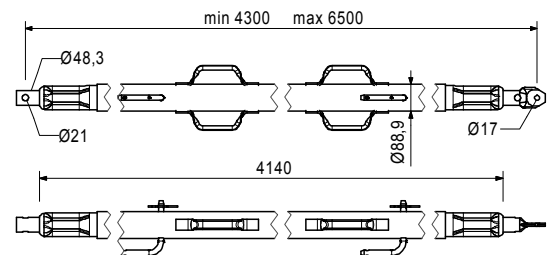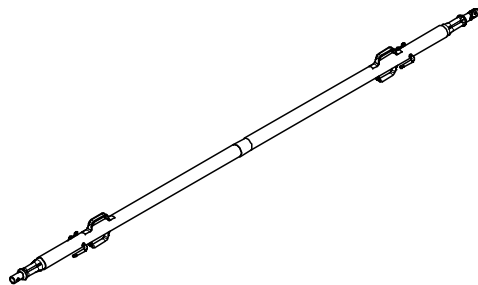



028990	115.000
--------	---------

Push-Pull Prop RS 1000, galv.

Extension length $l = 6.40 - 10.00$ m.
For aligning PERI formwork systems.

Note

Permissible load see PERI Design Tables.

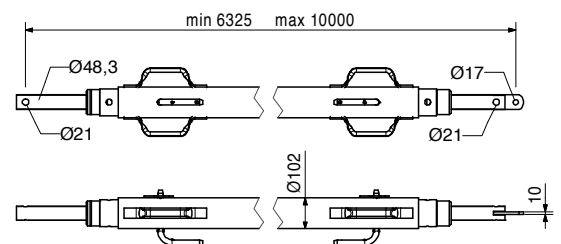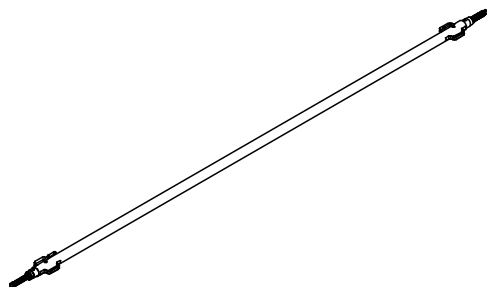




Item no.	Weight kg
103800	271.000

Push-Pull Prop RS 1400, galv.

Extension length $l = 6.40 - 14.00$ m.
For aligning PERI formwork systems.

Note

Permissible load see PERI Design Tables.
Chain can be operated from bottom.

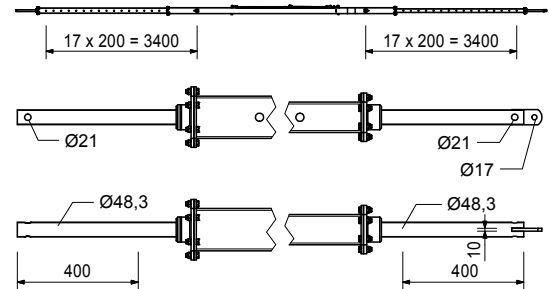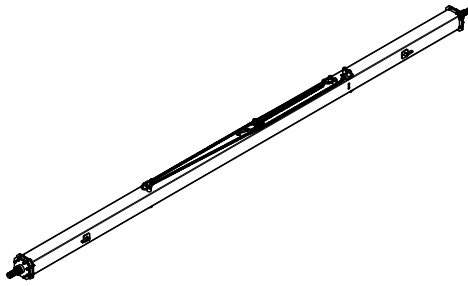



117343	3.250
--------	-------

Base Plate-2 for RS 210 - 1400, galv.

For assembly of Push-Pull Props RS 210, 260, 300, 450, 650, 1000 and 1400.

Complete with

2 pc. 105400 Pin $\text{Ø} 20 \times 140$, galv.
2 pc. 018060 Cotter Pin 4/1, galv.

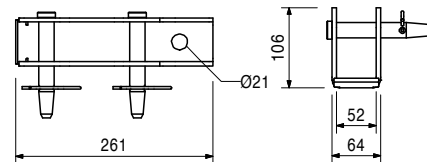

Accessories

124777	0.210
--------	-------

Anchor Bolt PERI 14/20 x 130



126666	3.070
--------	-------

Base Plate-3 for RS 210 - 1400

For assembly of Push-Pull Props RS 210, 260, 300, 450, 650, 1000 and 1400.

Complete with

2 pc. 105400 Pin $\text{Ø} 20 \times 140$, galv.
2 pc. 018060 Cotter Pin 4/1, galv.
1 pc. 113063 Bolt ISO 4014 M12 x 80-8.8, galv.
1 pc. 113064 Hex Nut ISO7042-M12-8-G, galv.

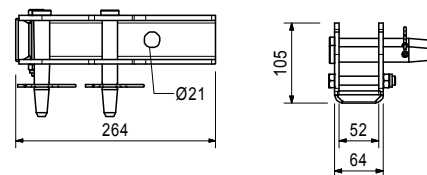

Accessories

124777	0.210
--------	-------

Anchor Bolt PERI 14/20 x 130



Item no.	Weight kg
028010	17.900

Push-Pull Prop RSS I

Extension length $l = 2.05 - 2.94$ m.
For aligning PERI formwork systems.

Note



Permissible load see PERI Design Tables.

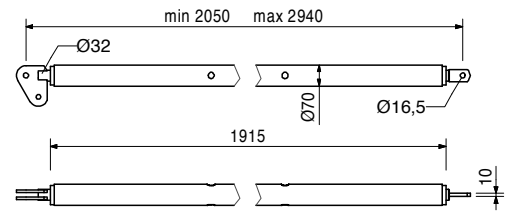

113397	1.600
--------	-------

Spindle Handle RSS / AV

Spindle Handle for screwing on Push-Pull-Props RSS I, RSS II, RSS III and Kickers AV 210 and AV 190 complete with 2 bolts and nuts M8.

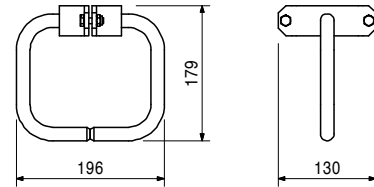



028020	22.000
--------	--------

Push-Pull Prop RSS II

Extension length $l = 2.91 - 3.80$ m.
For aligning PERI formwork systems.

Note

Permissible load see PERI Design Tables.

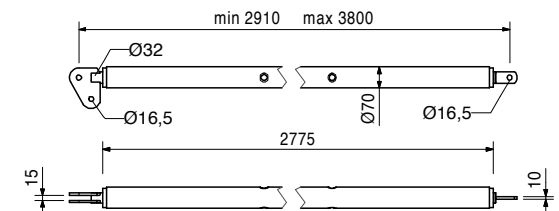



028030	38.400
--------	--------

Push-Pull Prop RSS III

Extension length $l = 4.60 - 6.00$ m.
For aligning PERI formwork systems.

Note



Permissible load see PERI Design Tables.

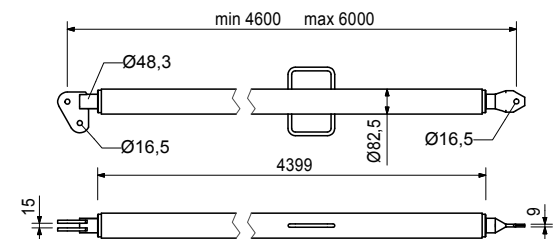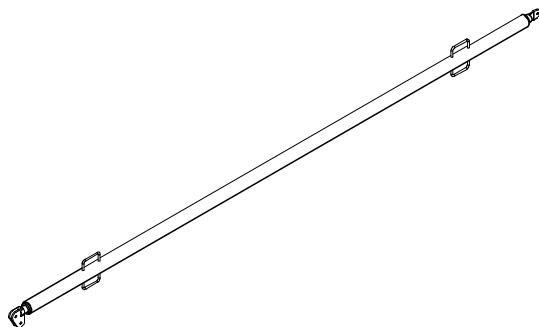

Item no.	Weight kg
106000	1.820

Base Plate-2 for RSS, galv.
For assembly of RSS Push-Pull Props.

Complete with
1 pc. 027170 Pin Ø 16 x 42, galv.
1 pc. 018060 Cotter Pin 4/1, galv.



Accessories
Anchor Bolt PERI 14/20 x 130



124777	0.210
--------	-------

Kickers AV	
057087	3.720
057088	4.410

Kicker AV 82
Kicker AV 111
For aligning PERI formwork systems.

min. L	max. L
500	820
790	1110



Complete with
1 pc. 027170 Pin Ø 16 x 42, galv.
1 pc. 018060 Cotter Pin 4/1, galv.
Note
Permissible load see PERI Design Tables.

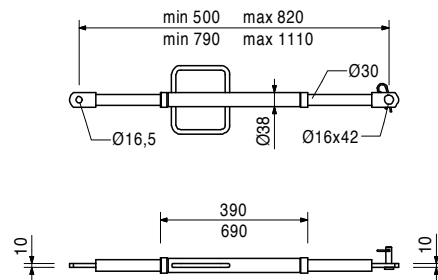

028110	5.180
--------	-------

Kicker AV 140
Extension length l = 1.08 – 1.40 m.
For aligning PERI formwork systems.

Complete with
1 pc. 027170 Pin Ø 16 x 42, galv.
1 pc. 018060 Cotter Pin 4/1, galv.
Note
Permissible load see PERI Design Tables.

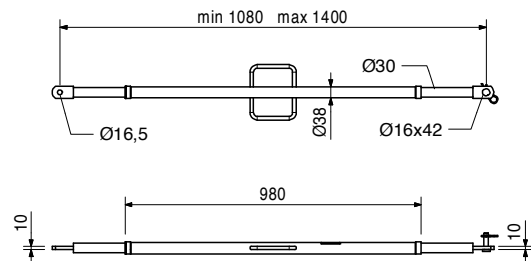

RUNDFLEX Circular Formwork



Item no.	Weight kg
108135	12.900

Kicker AV 210



Extension length $l = 1.28 - 2.10$ m.
For aligning PERI formwork systems.

Complete with

1 pc. 027170 Pin $\varnothing 16 \times 42$, galv.
1 pc. 018060 Cotter Pin 4/1, galv.

Note

Permissible load see PERI Design Tables.

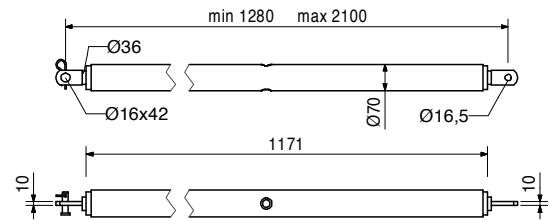

028120	17.000
--------	--------

Kicker AV RSS III



Extension length $l = 2.03 - 2.92$ m.
For aligning PERI formwork systems.

Complete with

1 pc. 027170 Pin $\varnothing 16 \times 42$, galv.
1 pc. 018060 Cotter Pin 4/1, galv.

Note

Permissible load see PERI Design Tables.

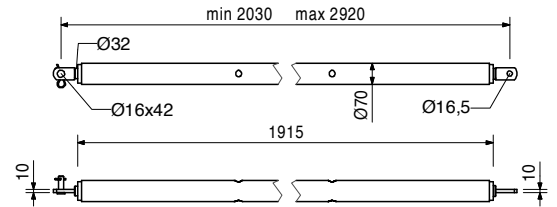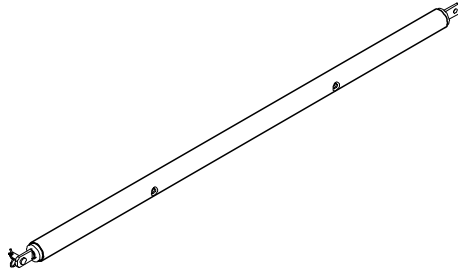



124777	0.210
--------	-------

Anchor Bolt PERI 14/20 x 130


For temporary fixation to reinforced concrete structures.

Note

See PERI data sheet!
Drilling $\varnothing 14$ mm.



PERI International

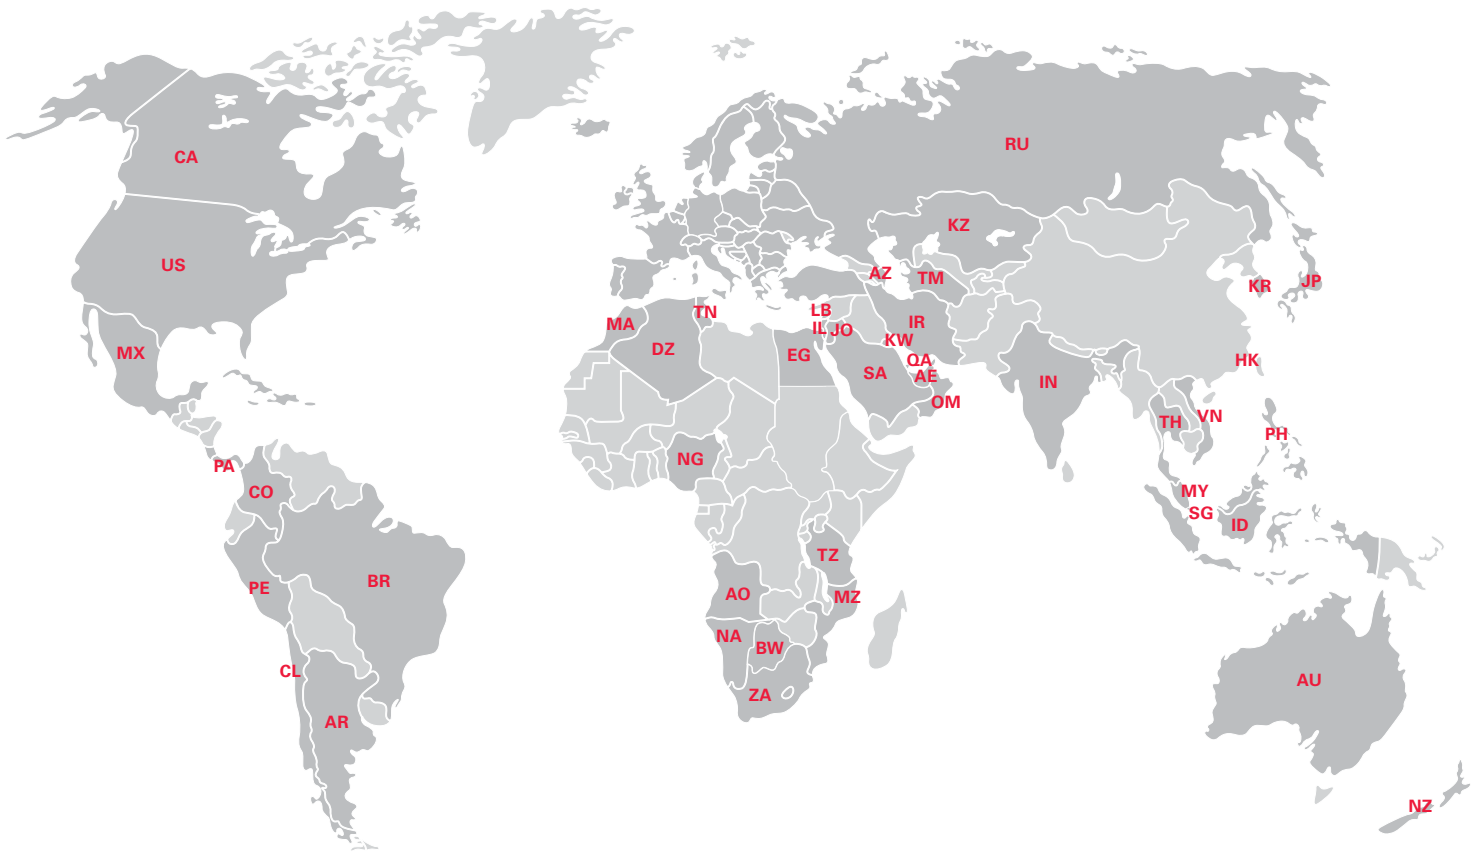

North America

- CA** Canada
PERI Formwork Systems, Inc.
www.peri.ca
- MX** Mexico
PERI Cimbras y Andamios, S.A. de C.V.
www.peri.com.mx
- PA** Panama
PERI Panama Inc.
www.peri.com.pa
- US** USA
PERI Formwork Systems, Inc.
www.peri-usa.com

South America

- AR** Argentina
PERI S.A.
www.peri.com.ar
- BR** Brazil
PERI Formas e Escoramentos Ltda.
www.peribrasil.com.br
- CL** Chile
PERI Chile Ltda.
www.peri.cl
- CO** Colombia
PERI S.A.S.
www.peri.com.co
- PE** Peru
PERI Peruana S.A.C.
www.peri.com.pe

Africa

- AO** Angola
Pericofragens, Lda.
www.peri.pt
- DZ** Algeria
S.A.R.L. PERI
www.peri.dz
- BW** Botswana
PERI (Proprietary) Limited
www.peri.co.bw
- EG** Egypt
Egypt Branch Office
www.peri.com.eg
- MA** Morocco
PERI S.A.
www.peri.ma
- MZ** Mozambique
PERI (Pty.) Ltd.
www.peri.co.mz
- NA** Namibia
PERI (Pty.) Ltd.
www.peri.na
- NG** Nigeria
PERI Nigeria Ltd.
www.peri.ng
- TN** Tunisia
PERI S.A.U.
www.peri.es
- TZ** Tanzania
PERI Formwork and Scaffolding Ltd
www.peritanzania.com
- ZA** South Africa
PERI Formwork Scaffolding (Pty) Ltd
www.peri.co.za

Asia

- AE** United Arab Emirates
PERI (L.L.C.)
www.perime.com
- AZ** Azerbaijan
PERI Representative Office
www.peri.com.tr
- HK** Hong Kong
PERI (Hong Kong) Limited
www.perihk.com
- ID** Indonesia
PT Beton Perkasa Wijaksana
www.betonperkasa.com
- IL** Israel
PERI F.E. Ltd.
www.peri.co.il
- IN** India
PERI (India) Pvt Ltd
www.peri.in
- IR** Iran
PERI Persa. Ltd.
www.peri.ir
- JO** Jordan
PERI GmbH – Jordan
www.peri.com
- JP** Japan
PERI Japan K.K.
www.perijapan.jp
- KR** Korea
PERI (Korea) Ltd.
www.perikorea.com
- KW** Kuwait
PERI Kuwait W.L.L.
www.peri.com.kw
- KZ** Kazakhstan
TOO PERI Kazakhstan
www.peri.kz
- LB** Lebanon
PERI Lebanon Sarl
lebanon@peri.de
- MY** Malaysia
PERI Formwork Malaysia Sdn. Bhd.
www.perimalaysia.com
- OM** Oman
PERI (L.L.C.)
www.perime.com
- PH** Philippines
PERI-Asia Philippines, INC.
www.peri.com.ph
- QA** Qatar
PERI Qatar LLC
www.peri.qa
- SA** Saudi Arabia
PERI Saudi Arabia Ltd.
www.peri.com.sa
- SG** Singapore
PERI Asia Pte Ltd
www.periasia.com
- TM** Turkmenistan
PERI Kalıp ve İşkeleleri
www.peri.com.tr
- TH** Thailand
Peri (Thailand) Co., Ltd.
www.peri.co.th
- VN** Vietnam
PERI ASIA PTE LTD
www.peri.com.vn



PERI GmbH
Formwork Scaffolding Engineering
Rudolf-Diesel-Strasse 19
89264 Weissenhorn
Germany
Tel. +49 (0)7309.950-0
Fax +49 (0)7309.951-0
info@peri.com
www.peri.com



Oceania

AU Australia
PERI Australia Pty. Ltd.
www.periaus.com.au

NZ New Zealand
PERI Australia Pty. Limited
www.peri.co.nz

Europe

AL Albania
PERI Kalıp ve İskeleleri
www.peri.com.tr

AT Austria
PERI Ges.mbH
www.peri.at

BA Bosnia and Herzegovina
PERI oplate i skele d.o.o
www.peri.com.hr

BE Belgium
N.V. PERI S.A.
www.peri.be

BG Bulgaria
PERI Bulgaria EOOD
www.peri.bg

BY Belorussia
IOOO PERI
www.peri.by

CH Switzerland
PERI AG
www.peri.ch

CZ Czech Republic
PERI spol. s r.o.
www.peri.cz

DE Germany
PERI GmbH
www.peri.de

DK Denmark
PERI Danmark A/S
www.peri.dk

EE Estonia
PERI AS
www.peri.ee

ES Spain
PERI S.A.U.
www.peri.es

FI Finland
PERI Suomi Ltd. Oy
www.perisuomi.fi

FR France
PERI S.A.S.
www.peri.fr

GB United Kingdom
PERI Ltd.
www.peri.ltd.uk

GR Greece
PERI Hellas Ltd.
www.perihellas.gr

HR Croatia
PERI oplate i skele d.o.o.
www.peri.com.hr

HU Hungary
PERI Kft.
www.peri.hu

IR Ireland
Siteserv Access & Formwork
www.siteservaccess.ie

IS Iceland
Armar ehf.
www.armor.is

IT Italy
PERI S.r.l.
www.peri.it

LT Lithuania
PERI UAB
www.peri.lt

LU Luxembourg
N.V. PERI S.A.
www.peri.lu

LV Latvia
PERI SIA
www.peri-latvija.lv

NL Netherlands
PERI B.V.
www.peri.nl

NO Norway
PERI Norge AS
www.peri.no

PL Poland
PERI Polska Sp. z o.o.
www.peri.com.pl

PT Portugal
Pericofragens Lda.
www.peri.pt

RO Romania
PERI România SRL
www.peri.ro

RS Serbia
PERI oplate d.o.o.
www.peri.rs

RU Russia
OOO PERI
www.peri.ru

SE Sweden
PERI Sverige AB
www.peri.se

SI Slovenia
PERI oplate i skele d.o.o
www.peri.com.hr

SK Slovakia
PERI spol. s. r.o.
www.peri.sk

TR Turkey
PERI Kalıp ve İskeleleri
www.peri.com.tr

UA Ukraine
TOW PERI
www.peri.ua

**The optimal System
for every Project and
every Requirement**



Wall Formwork



Column Formwork



Slab Formwork



Climbing Systems



Bridge Formwork



Tunnel Formwork



Shoring Systems



Construction Scaffold



Facade Scaffold



Industrial Scaffold



Access



Protection Scaffold



Safety Systems



System-Independent Accessories



Services



PERI GmbH
Formwork Scaffolding Engineering
 Rudolf-Diesel-Strasse 19
 89264 Weissenhorn
 Germany
 Tel. +49 (0) 7309.950-0
 Fax +49 (0) 7309.951-0
 info@peri.com
 www.peri.com